


Model: ICM-07W
7" Industrial Chassis Monitor (Wide Screen)

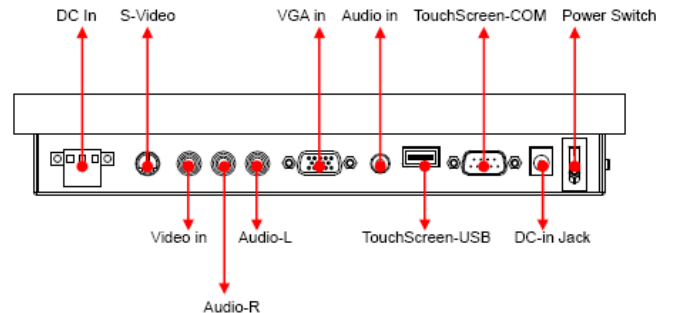

Main Feature

- 7" WVGA TFT LCD Panel support 800×480 pixels
- Heavy duty steel chassis with strengthen glass
- Rugged construction design
- Input signal : VGA + Audio
- OSD control keys to optimize the display
- AC 100-240V wide range external AC adapter
- Meet standard VESA hole (75x75 and 100x100 mm), support desktop stand/wall mount /swing arm mounting

Specification	
Product Model	ICM-07W
LCD Panel	Display Type : 7" WVGA TFT LCD Resolution : 800×480 Max. color : R.G.B stripe Luminance : 300 cd/m2 View Angel : 140° (H) , 120° (V) Pixel Pitch : 0.0635 x 0.1905 mm Contrast Ratio : 500 : 1 Response Time : 35 ms Power Consumption : 192mW LED backlight lifecycle : 20,000hrs
Signal Input	VGA (15 pin D-sub connector) + audio input (audio jack)
Protect Glass	3 mm strengthen glass
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and recall
Signal Connectivity (optional)	AV input (S-Video, RCA)
DC Power Input (optional)	Wide range DC 7V-28V input
Power Supply	Input: 100~240VAC, 50/60Hz Output: DC12V@ 4A /48W ,external ac adapter
Construction	Heavy duty steel chassis

Environment	Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%, non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak(11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	Dimensions: 250x195x41.1 mm
Weight	NET weight: 3.2KG; Gross weight: 5.4KG

Ordering Information

ICM-07W	7" Industrial Chassis Monitor (Wide Screen)
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (S-Video, RCA)

Structure Diagram

