


Model: ICM-10THR
10.4" Industrial Chassis Monitor (Resolution 1024×768) with Touch Screen

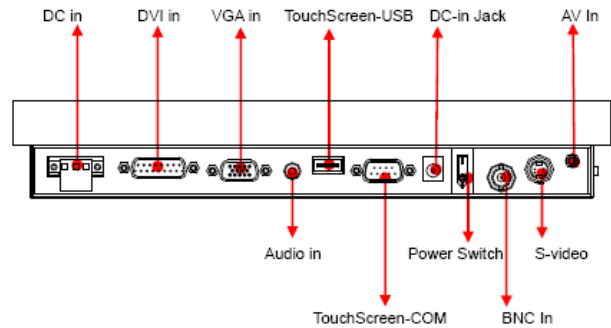

Main Feature

- 10.4" XGA TFT LCD Panel support 1024 × 768pixels
- Heavy duty steel chassis with strengthen glass
- Rugged construction and modularized design
- Input signal : VGA + DVI + Audio
- OSD control keys to optimize the display
- Build in 2x 2 Watts stereo speaker
- AC 100-240V wide range external ac adapter
- Meet standard VESA hole (75x75 and 100x100 mm), support desk top stand/wall mount/swing arm mounting

Specification	
Product Model	ICM-10THR
LCD Panel	Display Type : 10.4" XGA TFT LCD Resolution : 1024×768 Max. color : 16.2M Luminance : 400 cd/m2 View Angel : 100°(H) , 120°(V) Pixel Pitch : 0.0685 x 0.2055 mm Contrast Ratio : 1200 : 1 Response Time : 25 ms Power Consumption : 3.63W LCD MTBF : 50,000hrs
Signal Input	VGA (15 pin D-sub connector) + DVI (DVI-D) + audio input (audio jack)
Protect Glass	3 mm strengthen glass
Speaker	Built-in 2x stereo speakers(2watt)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and recall
Touch Screen (optional)	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more

	Power consumption: <5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
Signal Connectivity (optional)	AV input (S-Video, RCA, BNC)
DC Power Input (optional)	Wide range DC 7V-28V input
Power Supply	Input: 100~240VAC, 50/60Hz Output: DC12V@ 4A /48W ,external ac adapter
Construction	Heavy duty steel chassis
Environment	Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%@ 40°C , non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak(11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	Dimensions: 280x230x45.8 mm
Weight	NET weight: KG; Gross weight: KG

Ordering Information

ICM-10THR	10.4" Industrial Chassis Monitor (Resolution 1024×768), with Touch Screen
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (S-Video, RCA)

Structure Diagram

