


Model: IDPMB-07WT
7" Industrial Panel Monitor (Wide Screen) with Touch Screen

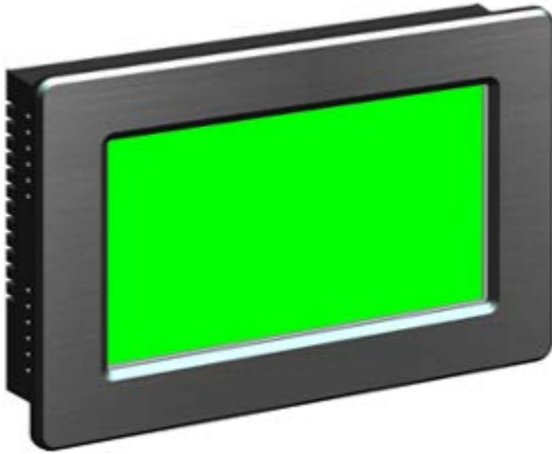

Main Feature

- 7" WVGA TFT LCD Panel support 800×480 pixels
- 6mm Aluminum front bezel with strengthen glass
- Rugged construction design
- Input signal : VGA + USB (for touch screen)
- OSD control keys to optimize the display
- NEMA4 / IP 65 compliant front panel
- AC 100-240V wide range external AC adapter
- Panel mounting with clip
- Meet standard VESA hole (75x75mm), support desktop stand/wall mount /swing arm mounting

Specification	
Product Model	IDPMB-07WT
LCD Panel	Display Type : 7" WVGA TFT LED Panel Resolution : 800×480 Max. color : R.G.B stripe Luminance : 300 cd/m2 View Angel : 140° (H) , 120° (V) Pixel Pitch : 0.0635 x 0.1905 mm Contrast Ratio : 500 : 1 Response Time : 35 ms Power Consumption : 192mW LED backlight lifecycle : 20,000hrs
Signal Input	VGA (15 pin D-sub connector)
Protect Glass	3 mm strengthen glass
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and recall
DC Power Input (optional)	Wide range DC 7V-28V input

Touch Screen	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption: <5V @1mA Surface hardness : 3H Operating force : ≤100g Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
Power Supply	Input: 100-240VAC,50/60Hz Output: DC12V@ 4A /48W ,external ac adapter
Construction	Heavy duty steel and aluminum front panel
Environment	Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%, non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak(11m sec)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	210 x 140 x 40 mm

Ordering Information

IDPMB-07WT	7" Industrial Panel Monitor (Wide Screen), with Touch Screen
Optional: DC	Support DC input (7-28VDC)

Structure Diagram Unit: mm

