


Model: IDPMB-08
8" Industrial Panel Monitor

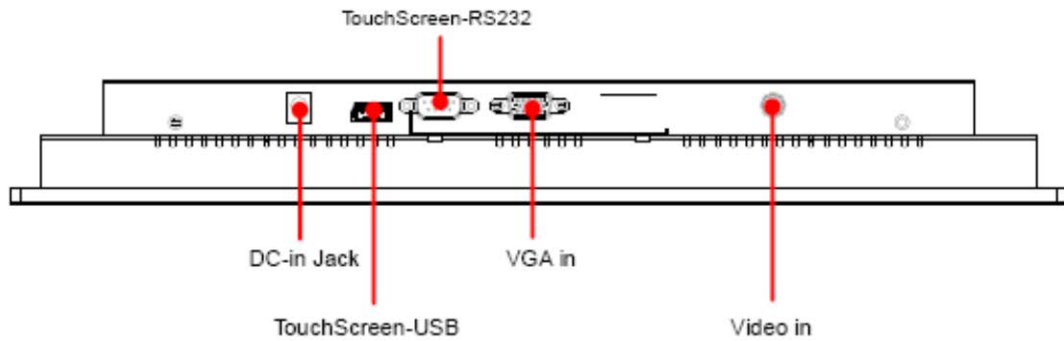

Main Feature

- 8" SVGA TFT LCD Panel support 800×600 pixels
- 6mm Aluminum front bezel with strengthen glass
- Rugged construction design
- Input signal : VGA + Optional: Video-In (BNC or RCA)
- OSD control keys to optimize the display
- NEMA4 / IP 65 compliant front panel
- AC 100-240V wide range external AC adapter
- Panel mounting with clip
- Meet standard VESA hole (75x75 mm), support desktop stand/wall mount /swing arm mounting

| Specification | |
|---------------|---|
| Product Model | IDPMB-08 |
| LCD Panel | Display Type : 8" SVGA TFT LCD Resolution : 800×600 Max. color : RGB Stripes Luminance : 250 cd/m2 View Angel : 140° (H), 120° (V) Pixel Pitch : 0.0675 x 0.2025 mm Contrast Ratio : 500 : 1 Response Time : 25 ms |

| | |
|----------------------------------|--|
| | LED backlight lifecycle : 20,000hrs |
| Signal Input | VGA (15 pin D-sub connector) + Video-In (BNC or RCA) |
| Protect Glass | 3 mm strengthen glass |
| OSD | Brightness, Contrast, H/V Position, Color, Phase, Clock, auto tune and recall |
| Signal Connectivity (optional) | AV input (BNC or RCA) |
| DC Power Input (optional) | Wide range DC 7V-28V input |
| Power Supply | Input: 100~240VAC,50/60Hz Output: DC12V@ 4A /48W ,external ac adapter |
| Construction | Heavy duty steel and aluminum front panel |
| Environment | Operating temperature: 0 °C to 50 °C Storage temperature: -20 °C to 60 °C Storage humidity: 10% to 95%, non-condensing Vibration: 17 to 500HZ 1G PTP Shock: 1G /peak(11m sec) |
| Safety | CE/FCC/Rohs |
| Dimension W x H x D (mm) | Dimensions: 260 x 185 x 36 mm |
| Weight | NET weight: 2.8KG; Gross weight: 4.5KG |

Ordering Information

| | |
|--------------|-------------------------------|
| IDPMB-08 | 8" Industrial Panel Monitor |
| Optional: DC | Support DC input (7-28VDC) |
| Optional: AV | Support AV Input (BNC or RCA) |

Structure Diagram

