


Model: IPC-4416

4U Server Case, 16 Hot-Swappable SAS/SATA Drive Bay, MINI-SAS backplane (SFF-8087, Max. 12Gb/s)

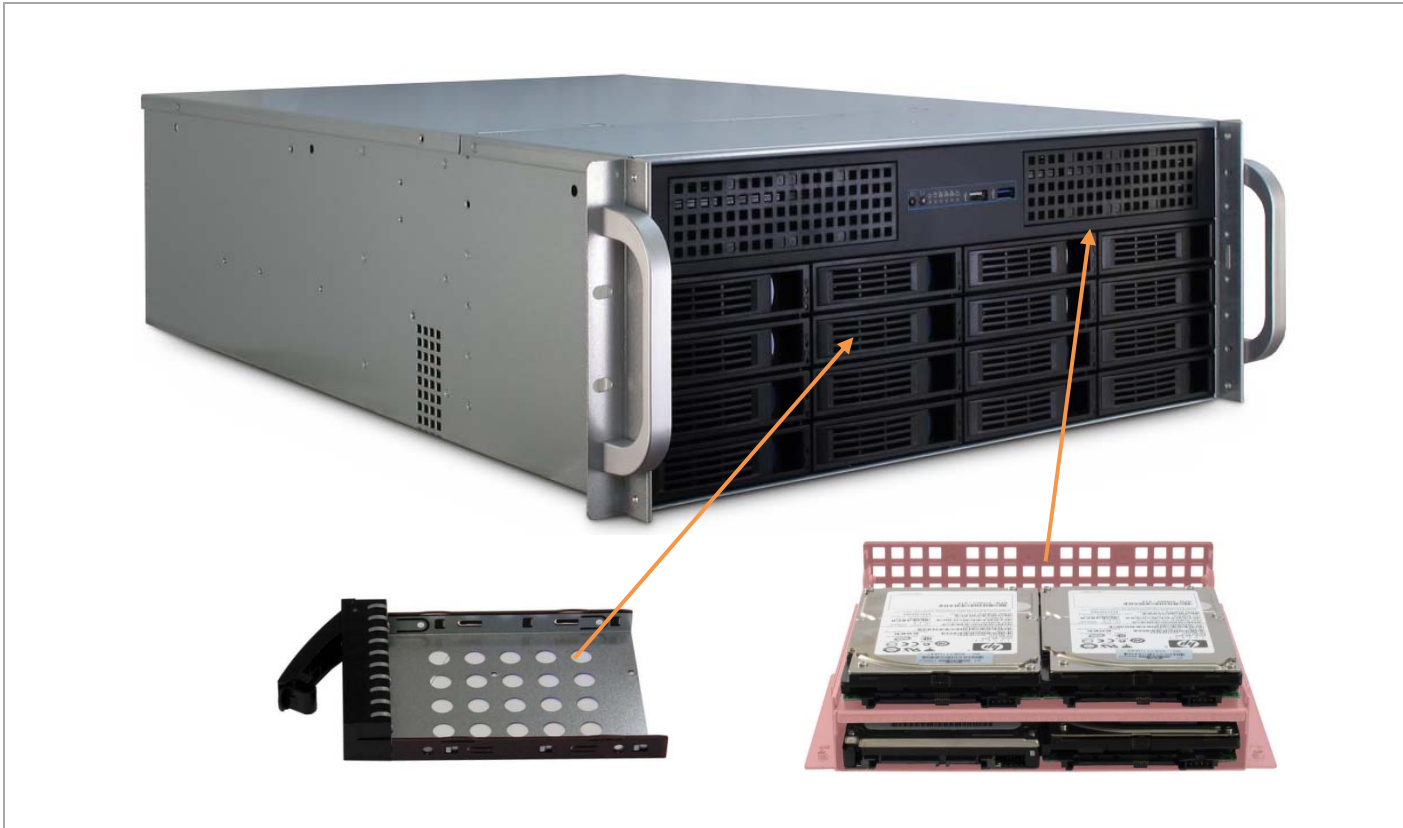

## Specification

- Form Factor: 4U, 19" Rackmount Chassis
- Color: Silver and Black
- Motherboard Support: MINI-ITX (6.7''x6.7''), Micro-ATX (9.6''x9.6''), ATX (12"x9.6"), CEB (12"x10.5"), EEB (12"x13")
- Processor Support: Supports dual, single Intel® / AMD processors
- Power Supply Support: standard ATX, PS2 / Mini Redundant
- Dimensions ( H x W x D ): 178mm x 480mm x 690mm
- Expansion Slots: 7
- Drive Bay: 16 x 2.5'' / 3.5'' hot-swappable SAS/SATA trays, 8 x 2.5'' or 2 x 3.5'' bay for OS drive
- Backplane: 4 x SFF-8087 Mini SAS connectors (Max. 12Gb/s)
- Front Panel: Power ON/OFF switch, System Reset switch, 2 x USB 2.0/3.0 port
- Front LED: 1 x Power ON, 1 x HDD activity, 3 x LAN activity, 2 x Alarm
- System Cooling: 3 x 120mm middle fans (Hot-swap type, Molex connector), 2 x 80mm rear fans
- Material: 1 - 1.2mm steel
- Operating Temperature: 0/50 °C
- Storage Temperature: -20/60 °C
- Storage Humidity: 10% to 90%, non-condensing
- Packing: Double Carton boxes, 250mm x 560mm x 830mm ( H x W x D )
- Weight: 15.5 Kg(net), 18.5 Kg (gross)

## Optional items

- Sliding Rail (For server rack depth 800 to 1000mm)
- Telescopic Sliding Rails For server rack depth 800 to 1200mm