



Model: KVM-1916COMBO-DR
1U Rackmount Dual Rail 19" TFT LCD, with 16 port KVM switch



Main Feature

- LCD Monitor & Keyboard could pull-out & push back independently
- One console controls up to 8 / 16 directly connected computers
- Dedicated daisy chain port to expand up to 240 servers
- One additional one USB Local console to add local KB/Mouse & VGA.
- Support multiple form - PS/2 and USB computers (SUN and MAC)
- Support DOS, Windows, Netware, Unix, Linux, Mac OS
- Hot Pluggable - Add or remove connected PCs without having to power down the KVM switch or computers
- No software required - easy PC selection via Push Buttons, Hot Keys or OSD (on screen display)
- Auto Scan Mode for monitoring PCs
- Firmware upgradeable for staying compatible with new coming computers
- Durable 104-key keyboard and touch pad
- Self-locking and auto release rails for ultra-convenience.

RearView

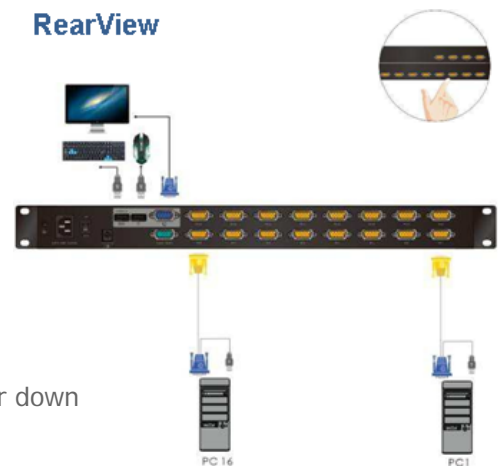

| Specification | | |
|--|-----------------------|--|
| Product Model | | KVM-1916COMBO-DR |
| LCD | Size | 19" TFT |
| | Resolution | 1280 X 1024 |
| | Max. color | 16.7M |
| | Luminance | 300 nit (LED Backlight) |
| | View Angel | 178° (H) , 178° (V) |
| | Contrast Ratio | 1000 : 1 |
| Computer Connections | Direct | 16 |
| | Maximum | 232 / 240 |
| Computer Port Selection | | OSD, Hot Key, Push Button |
| Connector | Power | AC Inlet |
| | Computer | HDB 15 Female |
| | Daisy Chain | HDB 15 Female |
| | Local Console | 2 x USB for Keyboard & Mouse, 1 x VGA for Monitor |
| CAT5-Based Remote Transmit / Receive Module (Optional: KV-300) | | KVM Extender transmits KVM up to 300m away from a computer using Cat5/5e/6 cable |
| LEDs | Port | 16 |
| | Power | 1 |
| Button / Switch | Power Switch | Rock Switch |
| | LCD Adjustment | Button |
| Hotkey | | Provide various Hotkey (Scroll-Lock/ Cap-Lock/ Num-Lock/ Alt/ Ctrl) |
| Auto-Scan Intervals | | 5 - 99 Sec. |
| Video Resolution (Local Console) | | 1280 x 1024 |
| Power Input Rating | | 100-240VAC ; 50/60Hz ; 1A |
| Environment | Operating Temperature | 0-50°C |
| | Store Temperature | -20-60°C |
| | Humidity | 0-80% RH , NC |
| Housing | | Heavy Duty Steel |
| Size | | 19" Rack mount, 1U |
| Net Weight | | 16.5KG |
| Gross Weight | | 20KG |
| Dimensions (W*D*H) | | 482 x 720 x 44 mm |
| Packing Dimensions (W*D*H) | | 590 x 850 x 170 mm |
| Order Information | | |
| KVM-1916COMBO-DR | | 1U Rackmount Dual Rail 19" TFT LCD, with 16 port KVM switch |
| KCVU-018 | | USB, 2 in 1 KVM Cable , 1.8 meter length |
| KCVU-030 | | USB, 2 in 1 KVM Cable , 3.0 meter length |
| KCVU-050 | | USB, 2 in 1 KVM Cable , 5.0 meter length |
| KCVU-018 | | PS/2, 3 in 1 KVM Cable , 1.8 meter length |
| KCVU-030 | | PS/2, 3 in 1 KVM Cable , 3.0 meter length |

Structure Diagram Unit :mm

