


Model: **KVM-2108COMBO**  
1U Rackmount 21.5" Full HD LCD, with 8 port KVM switch

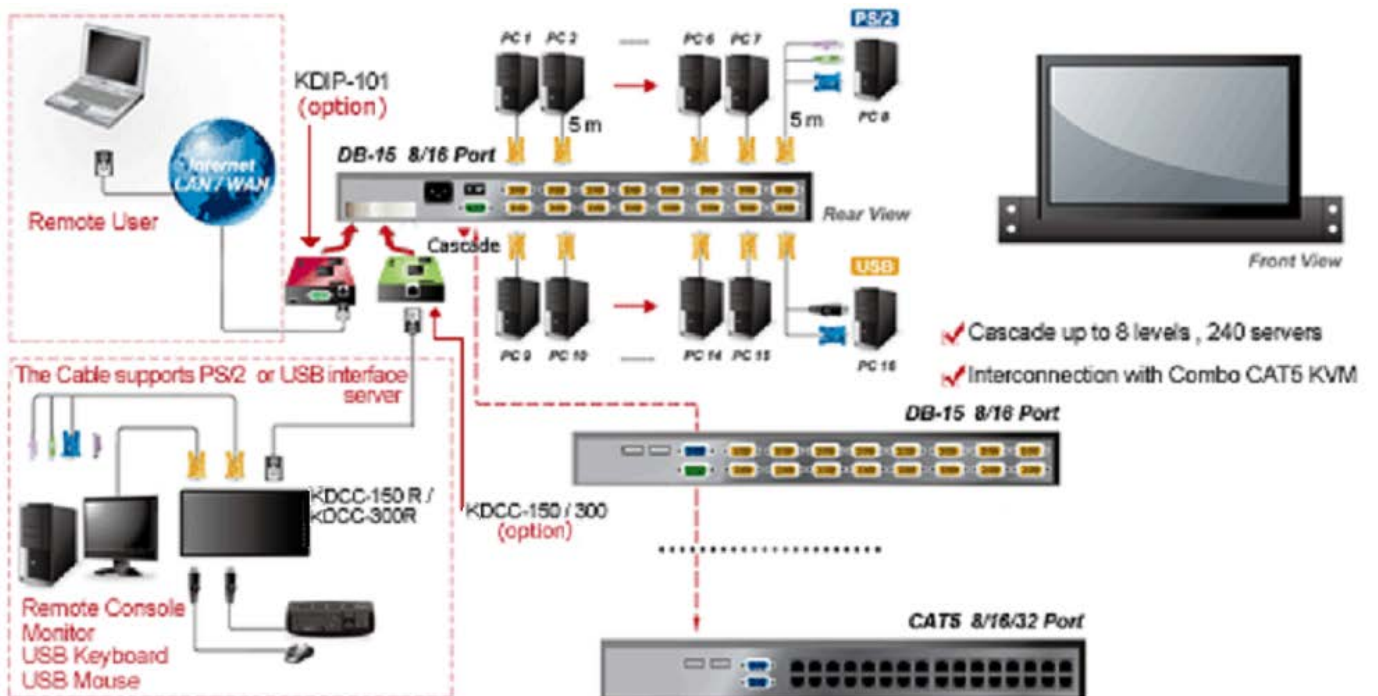

## Features

- 21.5" Full HD LED Panel support 1920 × 1080 pixels
- One PS/2 console controls up to 8 directly connected computers
- Support an optional remote console (Cat5 based or Over-IP)
- CAT5 console up to 1000 feet away from KVM switch with superior auto-adjust RGB gain/delay control capability
- Support multiple form - PS/2 and USB computers (SUN and MAC)
- Support DOS, Windows, Netware, Unix, Linux, Mac OS
- Hot Pluggable - Add or remove connected PCs without having to power down the KVM switch or PCs.
- No software required - easy PC selection via Push Buttons, Hot Keys or OSD (on screen display)
- Support Daisy Chaining up to 7 additional units
- Auto Scan Mode for monitoring PCs
- Firmware upgradeable for staying compatible with new coming computers
- Metal case, rack mountable Support DDC2B for all ports

Specification		
Product Model		KVM-2108COMBO
LCD	Size	21.5"
	Resolution	1920 X 1080
	Max. color	16.7M
	Luminance	250 cd/m2
	View Angel	178°(H) , 178°(V)
	Contrast Ratio	3000 : 1
Computer Connections	Direct	8
	Maximum	128
Computer Port Selection		OSD , Hot Key , Push Button
Connector	Power	AC Inlet
	Computer	HDB 15 Female
	Daisy Chain	HDB 15 Female
	Console Port	Plus one Optional Modules: Selectable CAT5-Based or IP-Based Remote Console
<u>Optional:</u> CAT5-Based Remote Transmit / Receive Module (KDCC-300T/KDCC-300R)		RJ-45 Connector CAT5 console up to 1000 feet away from KVM switch with superior auto-adjust RGB gain/delay control capability
<u>Optional:</u> IP-Based Remote Console Module (KDIP-101)		RJ-45 8P8C for 10/100M Ethernet DB-9 pin male for Modem, Null modem and serial power Control Mini USB 2.0 receptacle
LEDs	Port	8
	Power	1
Button / Switch	Power Switch	Rock Switch
	LCD Adjustment	Button
Hotkey		Provide various Hotkey (Scroll-Lock/ Cap-Lock/ Num-Lock/ Alt/ Ctrl/ Win)
Auto-Scan Intervals		5 - 99 Sec.
Power Input Rating		100-240VAC ; 50/60Hz ; 1A
Power Consumption		48W
Environment	Operating Temperature	0 - 50°C
	Store Temperature	-20 - 60°C
	Humidity	0-80% RH , NC

Housing	Heavy Duty Steel
Size	19" Rack mount, 1U
Net Weight	17KG
Gross Weight	23KG
Dimensions (W*D*H)	448 x 776 x 42 mm
Packing Dimensions (W*D*H)	710 x 980 x 180 mm
<b>Order Information</b>	
KVM-2108COMBO	1U Rackmount 21.5" Full HD LCD, with 8 port KVM switch
KCVU-018	USB, 2 in 1 KVM Cable , 1.8 meter length
KCVU-030	USB, 2 in 1 KVM Cable , 3.0 meter length
KCVU-050	USB, 2 in 1 KVM Cable , 5.0 meter length
KCVP-018	PS/2, 3 in 1 KVM Cable , 1.8 meter length
KCVP-030	PS/2, 3 in 1 KVM Cable , 3.0 meter length
KCVP-050	PS/2, 3 in 1 KVM Cable , 5.0 meter length
KDDC-300T & KDDC-300R	CAT5-Based Remote Transmit & Receive Module - for 300 meter
KDIP-101	IP-Based Remote Console Module

**Structure Diagram** Unit :mm

