


Model: RMF-17T
1U Foldable Rackmount 17" LCD, with Touch Screen

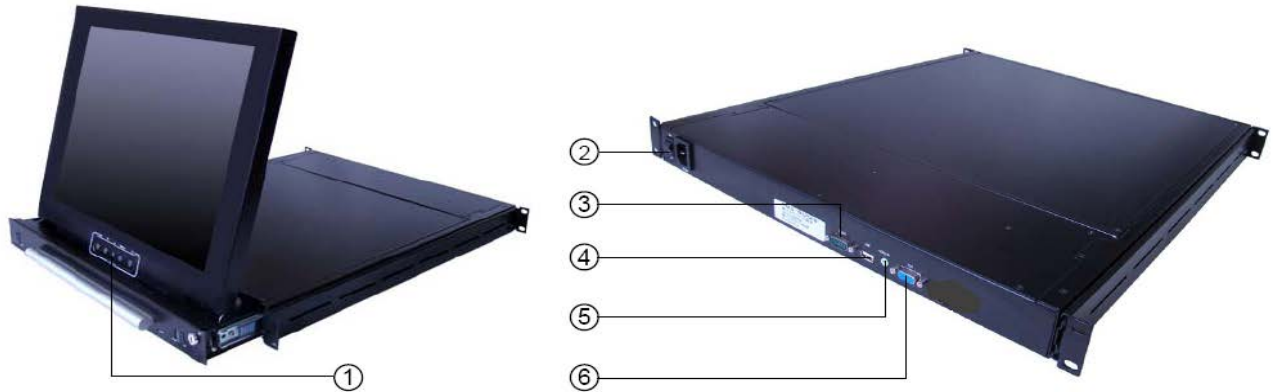

- | | | |
|-----------------|----------|-------------|
| 1. OSD Menu | 3. RS232 | 5. AUDIO IN |
| 2. Power Switch | 4. USB | 6. VGA |

Main Feature

- Foldable 1 U height rack-mounting design
- Construction: Heavy-duty steel
- Wide viewing angle
- OSD (On Screen Display) function
- Optional resistive touch screen function

Specification	
Product Model	RMF-17T
LCD Panel	Display Type: 17" SXGA TFT LCD Resolution : 1280 x 1024 Max. color : 16.7M Luminance : 300 cd/m2 View Angel : 178°(H) , 178°(V) Pixel Pitch : 0.264 x 0.264 mm Contrast Ratio : 1000 : 1 Response Time : 5 ms Power Consumption : 21.9W LCD MTBF : 50,000hrs
Signal Input	VGA (15 pin D-sub connector) + Audio input (audio jack)
Front panel protection	Hardness Glass
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
Touch Screen	Internal USB or RS-232 interface controller Type: Analog resistive type : 25VDC ≥ 20MΩ Resolution: continuous Light transmission: 80% or more Power consumption:<5V @1mA

	Surface hardness : 3H Operating force : $\leq 100g$ Life expectancy : 35 Million Operation system : Window 2000 / XP / Vista / 7 / CE, DOS , Linux
DC Power Input (optional)	Wide range DC 7V-28V input
Power Supply	Input: 100~240VAC,50/60Hz
Construction	Heavy duty steel
Speaker	2x2W internal stereo speaker
Operation Temperature	0~50°C
Dimension W x H x D (mm)	Dimensions: 480 x 44.4 x 550mm

Structure Diagram

Unit :mm

