


Model: RMM-15
7U, 19" Rack mount 15" TFT LCD monitor

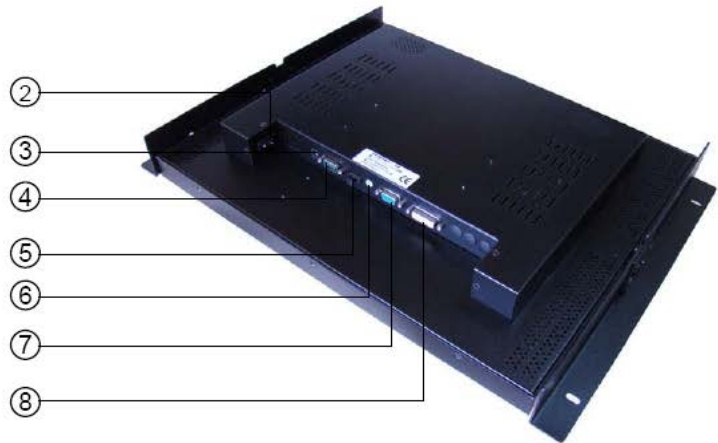

- 1. OSD button
- 2. Power Switch

- 3. DC Jack
- 4. TouchScreen COM Port

- 5. TouchScreen USB Port
- 6. Audio-in

- 7. VGA-IN
- 8. DVI-IN

Main Feature

- 7U, 19" Rack mount 15" TFT LCD monitor
- 90° tilt adjustment while mounted in rack: +45° ~-45°

Specification	
Product Model	RMM-15
LCD Panel	Display Type: 15" XGA TFT LCD Resolution : 1024×768 Max. color : 16.2M Luminance : 250 cd/m2 View Angel : 150°(H) , 135°(V) Pixel Pitch : 0.297 x 0.297 mm Contrast Ratio : 700 : 1 Response Time : 8 ms Power Consumption : 11.27W LCD MTBF : 50,000hrs
Signal Input	VGA (15 pin D-sub connector) + DVI (DVI-D) + audio input (audio jack)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
Signal Connectivity (optional)	AV input (BNC)
DC Power Input (optional)	Wide range DC 7V-28V input
Power Supply	DC12V@ 4A /48W ,external ac adapter
Speaker	2x2 W Stereo internal speaker
Construction	Heavy duty steel
Environment	Operating temperature: 32 °F-113 °F (0 °C to 45 °C) Storage temperature: -4 °F-140 °F (-20 °C to 60 °C) Storage humidity: 10% to 95%@ 40°C , on-condensing

	Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G Shock: 30G peak acceleration (11 msec. duration)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	Dimensions: 480.8x311.15x60mm Packing Dimension: 620x440x195mm
Weight	NET weight: 8.5KG; Gross weight: 9KG

Ordering Information

RMM-15	7U, 19" Rack mount 15'' TFT LCD monitor
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (BNC)

Structure Diagram

Unit :mm

