


Model: RMM-17
8U, 19" Rack mount 17" TFT LCD monitor

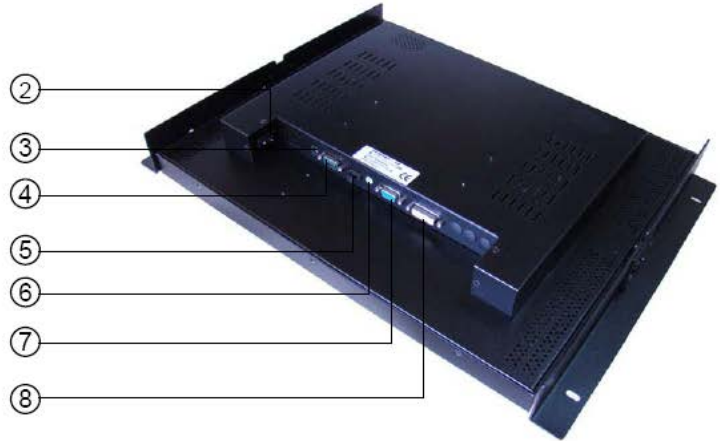

- | | | | |
|-----------------|-------------------------|-------------------------|-----------|
| 1. OSD button | 3. DC Jack | 5. TouchScreen USB Port | 7. VGA-IN |
| 2. Power Switch | 4. TouchScreen COM Port | 6. Audio-in | 8. DVI-IN |

Main Feature

- 8U, 19" Rack mount 17" TFT LCD monitor
- 90° tilt adjustment while mounted in rack: +45° ~-45°


Specification	
Product Model	RMM-17
LCD Panel	Display Type : 17" SXGA TFT LCD Resolution : 1280 x 1024 Max. color : 16.7M Luminance : 300 cd/m2 View Angel : 178°(H) , 178°(V) Pixel Pitch : 0.297 x 0.297 mm Contrast Ratio : 1000 : 1 Response Time : 5 ms Power Consumption : 21.9W LCD MTBF : 50,000hrs
Signal Input	VGA (15 pin D-sub connector) + DVI (DVI-D) + audio input (audio jack)
OSD	Brightness, Contrast, H/V Position, Color, Phase, Clock, Management
Signal Connectivity (optional)	AV input (BNC)
DC Power Input (optional)	Wide range DC 7V-28V input
Power Supply	DC12V@ 4A /48W ,external ac adapter
Speaker	2x2 W Stereo internal speaker
Construction	Heavy duty steel
Environment	Operating temperature: 32 °F-113 °F (0 °C to 45 °C) Storage temperature: -4 °F-140 °F (-20 °C to 60 °C) Storage humidity: 10% to 95%@ 40°C , on-condensing Vibration: 10 ~ 150Hz, 0.15mm 10 cycles 1G

	Shock: 30G peak acceleration (11 msec. duration)
Safety	CE/FCC/Rohs
Dimension W x H x D (mm)	Dimensions: 482.6x355x60mm Packing Dimension: 610x490x195mm
Weight	NET weight: 8.2KG; Gross weight: 11KG

Ordering Information

RMM-17	8U, 19" Rack mount 17" TFT LCD monitor
Optional: DC	Support DC input (7-28VDC)
Optional: AV	Support AV Input (BNC)

Structure Diagram

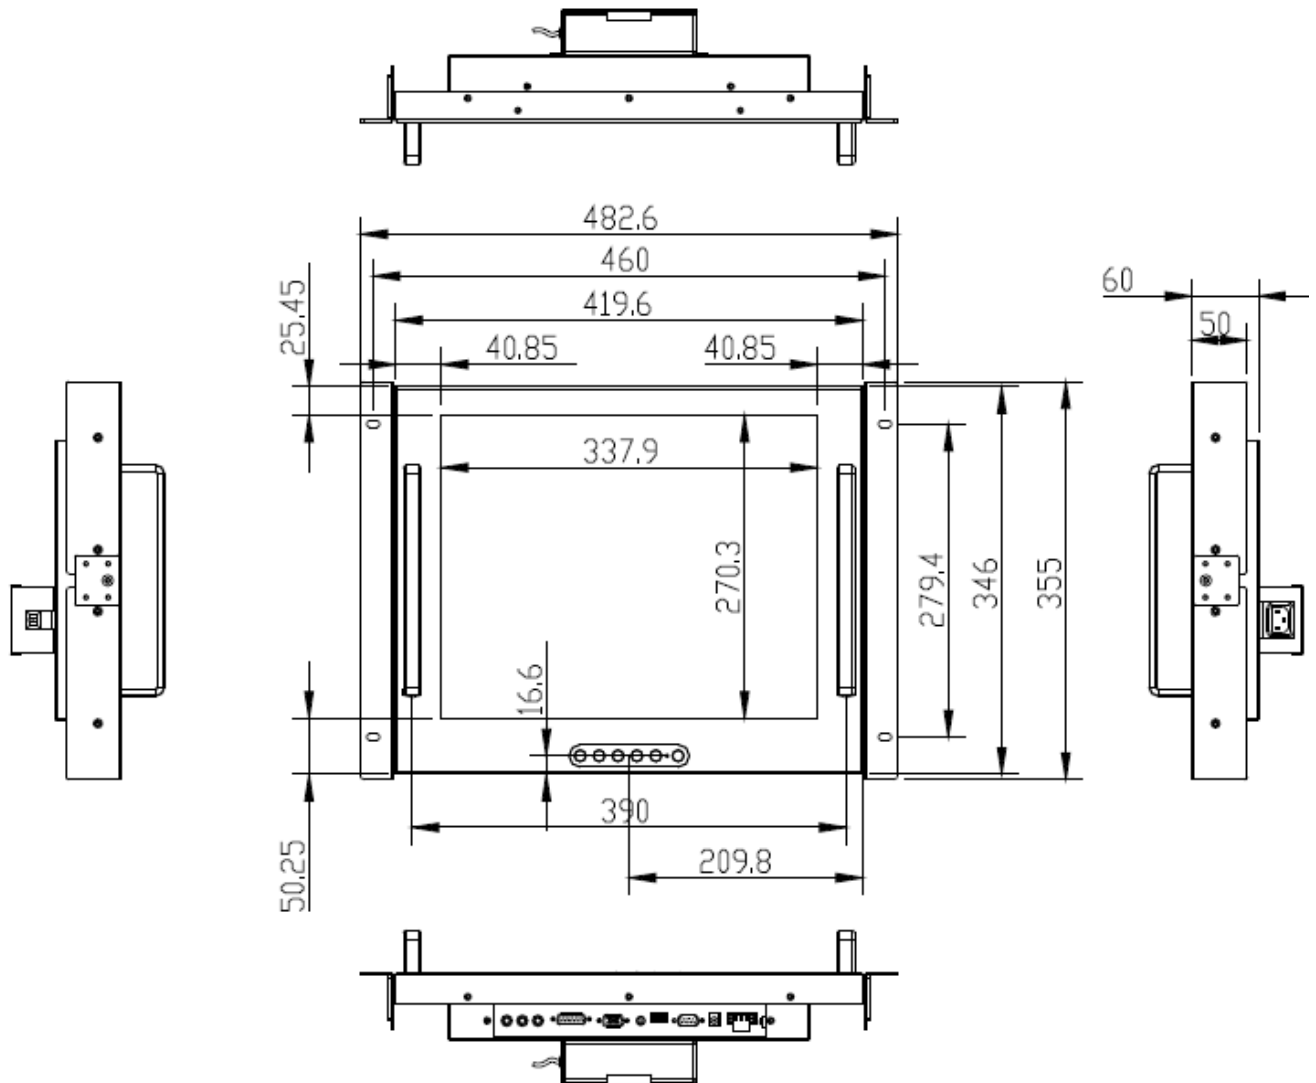

Unit :mm